

FI062BP




Support:



Key Features

- 1Mp 1280x1080 High Resolution
- Full HDTV
- IR Distance 60 Meters
- PoE Support
- ONVIF 2.0
- Dual Stream
- Weatherproof

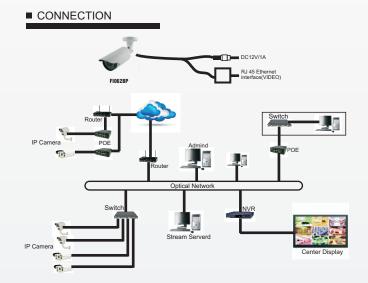

FI062BP HD IP CCTV Camera

Image Sensor	1/3" 2.4 Megapixel CMOS Image Sensor
Lens	2.8-12mm CS Mounted Lens
Resolution	1280x1080 @1080p 3Mp Full HD
Video Compression	H.264 /JPEG
Frame Per Second	2 Megapixel@25fps
Minimum Illumination	1Lux-sec
Day And Night	IR Cut Filter with auto switch, IR Sensor
IR Range Distance	60 Meter
Housing	lp66/ Weatherproof
Network	Rj45 Ethernet 10/100M
Protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP/TCP/SMTP
Onvif	Support Onvif 2.0
Power	DC 12V±10%,1200mA, POE Support
Temperature	-10~55° C
Ready Use	Outdoor Use
Others	Superior low-light performance both in VGA mode and HD mode, Support ABLC, Support Dual Stream, Provide open SDK PoE 802.3af