



FA002BP

Support :




iPhone BlackBerry

Key Features

- Weatherproof IR camera with 3-Axis Bracket
- IR LED: ϕ 5x24PCS IR LED working distance: 20M
- Water resistance: IP66
Cable built-in bracket
- Lens: Board Lens 3.6mm/F2.0
- Dimension: 148(W)x65(H)x63(D)mm

CONNECTION

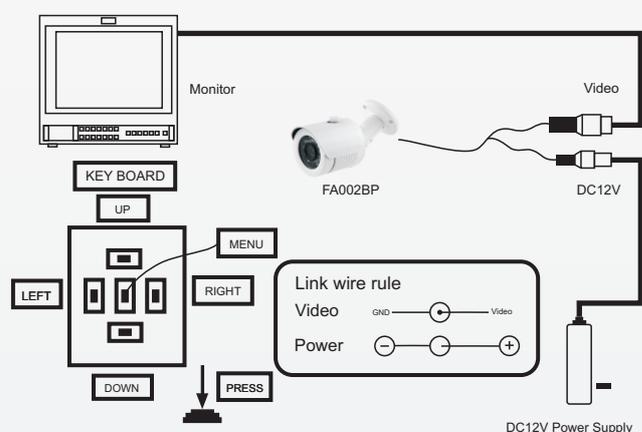

FA002BP Analog CCTV Camera

Image Sensor	1/3" HDIS 960H, 800TVL, With IR-CUT, UTC CMOS
Lens	Board Lens 3.6mm/F2.0
Electronic Shutter	Auto:PAL 1/50-1/100,000Sec;NTSC 1/60-1/100,000Sec
TV System	PAL / NTSC
Horizontal Resolution	960H, 800TVL, With IR-CUT, UTC
Effective Pixel	976(H)x496(V)
IR Distance	IR LED: ϕ 5x24PCS IR range: 20 Meter
IR Status	Under 10 Lux By CDS
IR Power ON	CDS Auto Control
Usable Illumination	0.001 Lux/F2.0
S/N Ratio	\geq 48dB (AGC OFF)
Power	DC12V \pm 10%, 500mA
Temperature	-10°C~+50°C Rh95% MAX
Ready Use	Outdoor
Others	Weatherproof Housing IP66